


POWER SWITCH

Code: PS 12-100

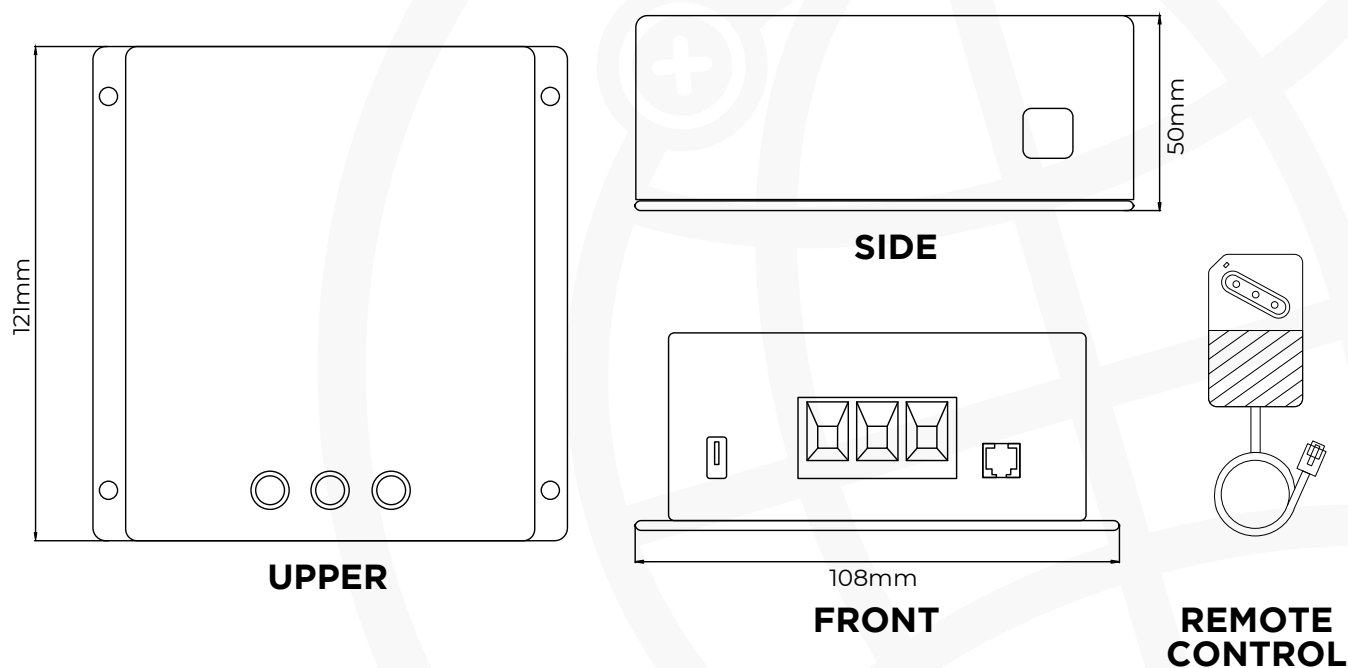

NOMINAL VOLTAGE	12V
POWER VOLTAGE	+10V ~ +15V
MAXIMUM SUPPORTED CURRENT	±100A
APPLIANCE DISCONNECTION VOLTAGE	10,5V
SPLIT CHARGE RELAY ACTIVATION	> 13,3V
SPLIT CHARGE RELAY DISABLING	< 12,7V
MAXIMUM CHARGING/DISCHARGING CURRENT	100A continues
BATTERY DISCONNECTION VOLTAGE	< 10,6V
BATTERY REACTIVATION VOLTAGE	> 12V
SELF-CONSUMPTION	15mA
FREQUENCY	DC
BLACKBOX WEIGHT	320g
REMOTE CONTROL WEIGHT	40g
SIZE	121x108x50mm

This data sheet is indicative. NDS Energy reserves the right to make changes to the illustrated items at any time, without prior notice, for technical or commercial reasons.

Last update date: 03/06/2019Data ultimo aggiornamento: 25/10/22



TUTTA L'ENERGIA CHE TI SERVE
ALL THE ENERGY YOU NEED